

# DS10-8

## Perimeter/Bottom Seal



### Description

A straight fin seal gasket held within an aluminium carrier.


### Features

This straight fin seal can flex under side pressure so it can be ideal for use in a range of sealing positions.

The black TPE-V seal gasket is strong and flexible due to its elastomeric properties.

A 100% aluminium carrier is screw fixed to the door, window or frame to securely hold the gasket seal in position.

The 23 x 8mm carrier has a curved edge and smooth surface profile which fully conceals the fixing screws.

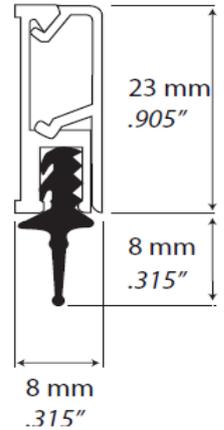

### Fitting Location

This seal can be fitted around the full perimeter or bottom of a door or window.

### Gap Size

Maximum 8mm gap coverage if fitted as standard. Consider also adjusting the position of carrier.

### Material and Finish

Black TPE-V gasket with clear anodised aluminium carrier and cover.

### Fixing

Installed using the supplied DSA screw pack.

### Approvals

Fire: AS1530.4

Smoke: AS1530.7/BCA C3.4

Acoustic: AS1191/ISO140.3/ISO10140.2

### Available As

1000mm length

2100mm length

2400mm length

2750mm length

All above can be trimmed to required length.

### DSA Product Code

DS10-8-1000MM

DS10-8-2100MM

DS10-8-2400MM

DS10-8-2750MM

