


# DS20-24SB

## Perimeter Seal




### Description

This is our highest performing perimeter seal and the acoustic attenuation is of an extremely high level.

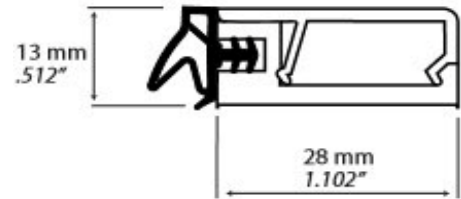

### Features

The unique DSA wedge shaped gasket requires minimal energy to compress due to its elastomeric properties. The DSA fitting system ensures a perfect installation as the seal is positioned and adjusted for optimum performance. The carrier has a projection of just 13mm and a width of 28mm. Also the carrier is 100% aluminium with a curved edge and smooth surface profile to compliment any door frame.

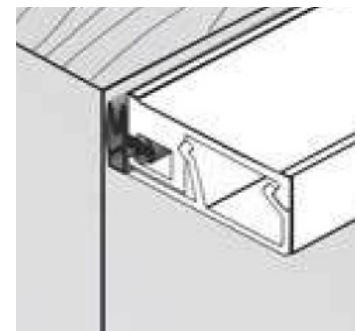

### Fitting Location

This perimeter seal is usually fitted to the head and jambs of a door frame. It can also be fitted as a door stop on non-rebated frames or across a door bottom to form a bulkhead seal.

### Material and Finish

Black TPE-V gasket with clear anodised aluminium carrier and cover.

### Fixing

Installed using the supplied DSA precise fitting system and screw pack.

### Approvals

Fire: AS1530.4  
Smoke: AS1530.7/BCA C3.4  
Acoustic: AS1191/ISO140.3/ISO10140.2

### Standard Door Set Packs Available

|                            |         |                     |
|----------------------------|---------|---------------------|
| Single Door Set            | SDS     | 1 x 1m, 2 x 2.1m    |
| Long Single Door Set       | LSDS    | 1 x 1m, 2 x 2.4m    |
| Extra Long Single Door Set | XLSDS   | 1 x 1m, 2 x 2.75m   |
| Double Door Set            | DDS     | 1 x 2.1m, 2 x 2.1m  |
| Long Double Door Set       | LDSDS   | 1 x 2.1m, 2 x 2.4m  |
| Extra Long Double Door Set | XLDDSDS | 1 x 2.1m, 2 x 2.75m |

### DSA Product Code

DS20-24SB-SDS  
DS20-24SB-LSDS  
DS20-24SB-XLSDS  
DS20-24SB-DDS  
DS20-24SB-LDSDS  
DS20-24SB-XLDDSDS

### These Products Can Work With The DS20-24SB Perimeter Seal

Automatic Door Bottom Seal - DRS1530  
Secondary Perimeter Seal - DS44

