


# GLASS BOTTOM



## Description

GLASS BOTTOM is used to seal the floor to door gap of hinged or pivoting glass doors.

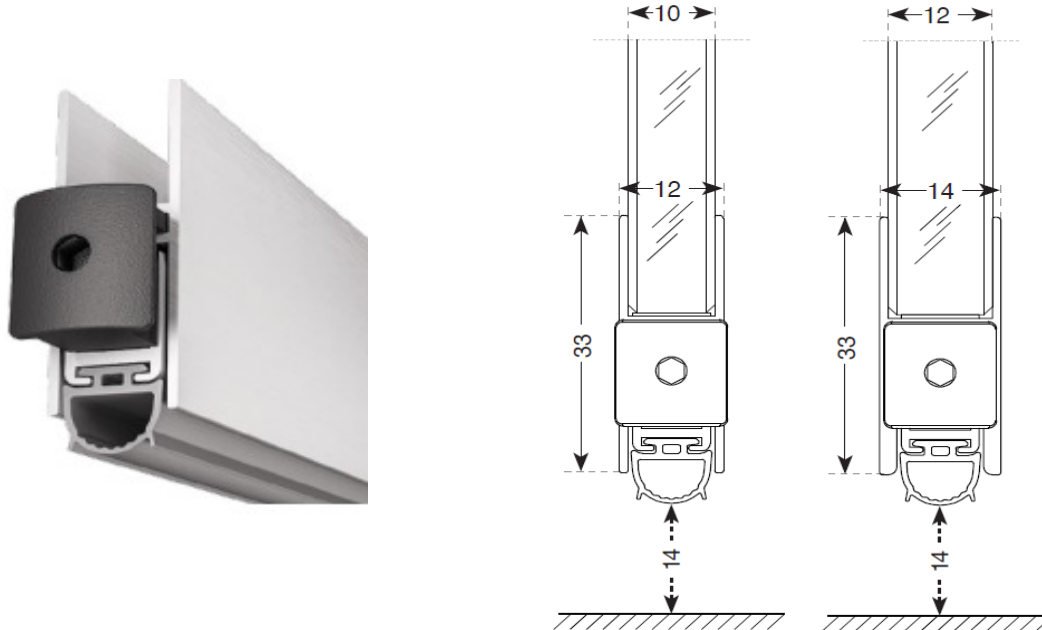

## Features

Model designed for the bottom of glass doors, with an activation mechanism that works when engaged by the door frame or surrounding panel, closing the seal on the floor when the door is totally closed. The cell seal is manufactured from self extinguishing coextruded thermoplastic and is tested to a 38dB acoustic rating.

## Fitting Location

It is suitable for fitting to the bottom of 10 or 12mm thick hinged or pivoting glass doors.

## Gap Size

It is suitable to seal gaps to 14.0mm.

## Material and Finish

The aluminium profile is available in a variety of finishes or stainless steel.

## Fixing

Fixed with very high strength adhesive bond tape.

## Approvals

Fire: AS1530.4 Smoke: AS1530.7/BCA C3.4 Acoustic: AS1191/ISO140.3/ISO10140.2

## Available As

Lengths from 330mm to 1830mm  
Contact us for further details.

**DSA Product Code**  
**GLASS BOTTOM**